# AC/DC Converter
## LDE45-20Bxx Series

MORNSUN®

45W, AC/DC converter



CE Report EN62368-1 | CB IEC62368-1 | UKCA BS EN 62368-1 | RoHS | 3 year Warranty

## FEATURES

- Universal 85-264VAC or 100-370VDC input voltage
- Operating ambient temperature range: -40℃ to +70℃
- High I/O isolation test voltage up to 4000VAC
- Regulated output, low ripple & noise, low power consumption
- High efficiency, high power density
- Output short circuit, over-current, over-voltage protection
- Plastic case meets UL94V-0 flammability
- EMI performance meets CISPR32/EN55032 CLASS B
- Design to meet UL62368

*LDE45-20Bxx series is one of Mornsun's compact size power converters. It features universal AC input and at the same time accepts DC input voltage, low power consumption, high efficiency, high reliability, reinforced isolation. The converters are widely used in industry, electricity, instrument, communication and civil applications. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.*

## Selection Guide

| Certification | Part No.* | Output Power | Nominal Output Voltage and Current (Vo/Io) | Efficiency at 230VAC (%) Typ. | Capacitive Load (uF) Max. |
|---|---|---|---|---|---|
| EN/IEC | LDE45-20B05 | 40W | 5V/8A | 81 | 30000 |
| | LDE45-20B12 | 45W | 12V/3.8A | 84 | 6400 |
| | LDE45-20B15 | | 15V/3A | 85 | 5600 |
| | LDE45-20B24 | | 24V/1.9A | 86 | 2000 |
| | LDE45-20B48 | | 48V/0.94A | 87 | 600 |

Note: 1. * Use suffix "A2S" for chassis and suffix "A4S" for DIN-Rail mounting.
2. The product picture is for reference only. For details, please refer to the actual product.

## Input Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|
| Input Voltage Range | AC input | 85 | -- | 264 | VAC |
| | DC input | 100 | -- | 370 | VDC |
| Input Frequency | | 47 | -- | 63 | Hz |
| Input Current | 115VAC | -- | -- | 1.5 | A |
| | 230VAC | -- | -- | 0.75 | |
| Inrush Current | 115VAC | -- | 50 | -- | |
| | 230VAC | -- | 70 | -- | |
| Built-in Fuse | | 3.15A/250V, slow-blow | | | |
| Hot Plug | | Unavailable | | | |

## Output Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|
| Output Voltage Accuracy | Full load | -- | ±2 | -- | % |
| Line Regulation | Rated load | -- | ±0.5 | -- | |
| Load Regulation | 0%-100% load | -- | ±1 | -- | |
| Ripple & Noise* | 20MHz bandwidth (peak-to-peak value) | -- | 60 | 120 | mV |
| Temperature Coefficient | | -- | ±0.02 | -- | %/℃ |
| Stand-by Power Consumption | 230VAC, normal temperature | -- | -- | 0.5 | W |
| Short Circuit Protection | | Hiccup, continuous, self-recover | | | |
| Over-current Protection | | ≥110%Io, self-recover | | | |
| Over-voltage Protection | 5VDC output | ≤ 9V (Output voltage clamp or hiccup) | | | |
| | 12VDC output | ≤ 16V (Output voltage clamp or hiccup) | | | |
| | 15 VDC output | ≤ 24V (Output voltage clamp or hiccup) | | | |
| | 24 VDC output | ≤ 35V (Output voltage clamp or hiccup) | | | |
| | 48 VDC output | ≤ 56V (Output voltage clamp or hiccup) | | | |


MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

| | | | | | |
|---|---|---|---|---|---|
| Minimum Load | | 0 | -- | -- | % |
| Hold-up Time | 115VAC input | -- | 8 | -- | ms |
| | 230VAC input | -- | 50 | -- | |
| Note: * The "parallel cable" method is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information. | | | | | |

## General Specifications

| Item | | Operating Conditions | | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|---|---|
| Isolation | Input - Output | Electric Strength Test for 1min., leakage current <5mA | | 4000 | -- | -- | VAC |
| Operating Temperature | | | | -40 | -- | +70 | ℃ |
| Storage Temperature | | | | -40 | -- | +85 | |
| Storage Humidity | | | | -- | -- | 95 | %RH |
| Soldering Temperature | | Wave-soldering, Max. 10 seconds | | 255 | 260 | 265 | ℃ |
| | | Manual-welding, Max. 5 seconds | | 350 | 360 | 370 | |
| Power Derating | | -40℃ to -25℃ | 85-220VAC input | 4.00 | -- | -- | %/℃ |
| | | -40℃ to -25℃ | 220-264VAC input | 0 | -- | -- | |
| | | +50℃ to +70℃ | | 2.50 | -- | -- | |
| | | 85VAC - 100VAC | | 1.33 | -- | -- | %/VAC |
| | | 240VAC - 264VAC | | 1.25 | -- | -- | |
| Safety Standard | | | | IEC62368-1 safety approved & EN/BS EN62368-1(Report); Design refer to UL62368-1 | | | |
| Safety Class | | | | CLASS I I | | | |
| MTBF | | | | MIL-HDBK-217F@25℃ > 300,000 h | | | |

## Mechanical Specifications

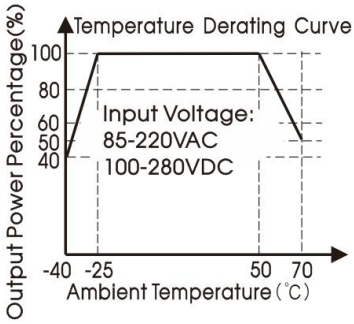
| | | |
|---|---|---|
| Case Material | Black plastic, flame-retardant and heat-resistant (UL94V-0) | |
| Dimension | DIP | 87.00 x 52.00 x 29.50 mm |
| | A2S chassis mounting | 135.00 x 70.00 x 37.90 mm |
| | A4S Din-Rail mounting | 137.00 x 70.00 x 42.40 mm |
| Weight | DIP | 205g (Typ.) |
| | A2S chassis mounting | 290g (Typ.) |
| | A4S Din-Rail mounting | 360g (Typ.) |
| Cooling Method | Free air convection | |


## Electromagnetic Compatibility (EMC)

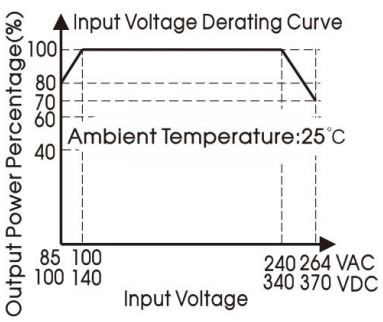
| | | | | |
|---|---|---|---|---|
| Emissions | CE | CISPR32/EN55032 | CLASS B | |
| | RE | CISPR32/EN55032 | CLASS B | |
| Immunity | ESD | IEC/EN61000-4-2 | Contact ±6KV/ Air ±8KV | perf. Criteria B |
| | RS | IEC/EN61000-4-3 | 10V/m | perf. Criteria A |
| | EFT | IEC/EN 61000-4-4 | ±4KV | perf. Criteria B |
| | Surge | IEC/EN 61000-4-5 | line to line ±1KV | perf. Criteria B |
| | | IEC/EN 61000-4-5 | line to line ±2KV/ line to PE ±4KV (See Fig. 2 for recommended circuit) | perf. Criteria B |
| | CS | IEC/EN61000-4-6 | 10Vr.m.s | perf. Criteria A |
| | Voltage dip, short interruption and voltage variation | IEC/EN61000-4-11 | 0%, 70% | perf. Criteria B |


MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

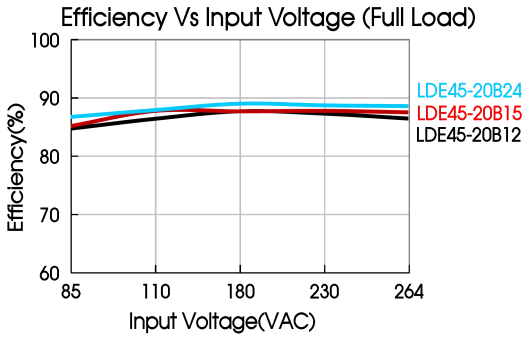
## Product Characteristic Curve

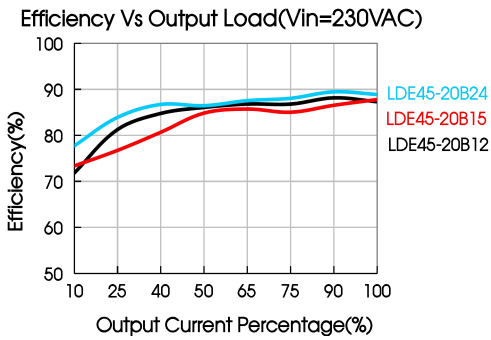



Note: ① With an AC input between 85-100VAC/240-264VAC and a DC input between 100-140VDC/340-370VDC, the output power must be derated as per temperature derating curves;
② This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.




## Design Reference

### 1. Typical application

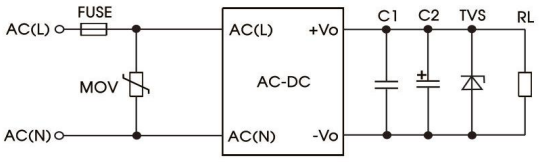



Fig. 1: Typical circuit diagram

| Part No. | C1(uF) | C2(uF) | FUSE | MOV | TVS |
|---|---|---|---|---|---|
| LDE45-20B05 | 1 | 680 | 3.15A/250V, slow-blow | S14K350 | SMBJ7.0A |
| LDE45-20B12 | | 220 | | | SMBJ20A |
| LDE45-20B15 | | 220 | | | SMBJ20A |
| LDE45-20B24 | | 120 | | | SMBJ30A |
| LDE45-20B48 | | 100 | | | SMBJ64A |

Output Filter Components:
We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

### 2. EMC compliance recommended circuit

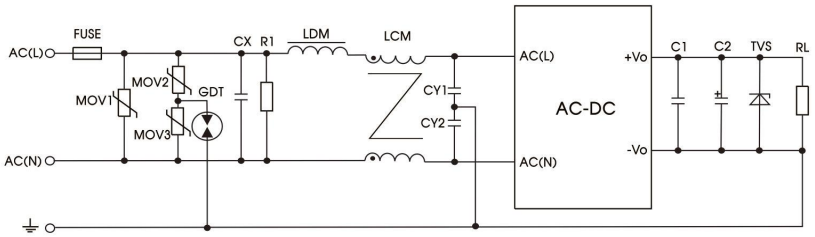



Fig. 2: EMC application circuit with higher requirements
(Output external circuit refer to the typical application circuit)

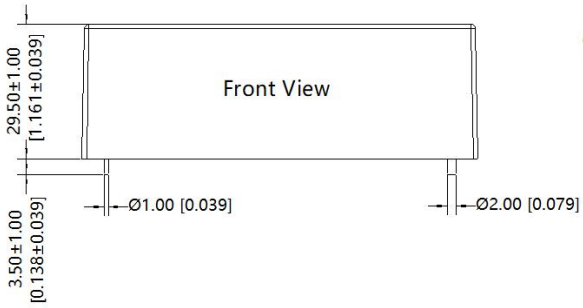

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

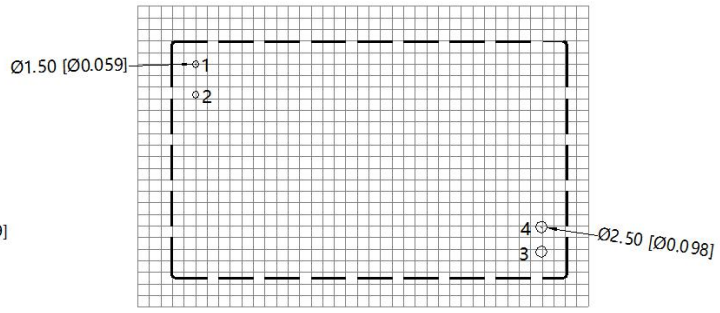
| Component | Recommended value |
|---|---|
| FUSE | 3.15A/250V, slow-blow, required |
| MOV1 | S20K300 |
| MOV2/MOV3 | S10K300 |
| GDT | EM3600XS |
| CX | 0.22uF/275VAC |
| CY1/CY2 | 1nF/400VAC |
| R1 | 1MΩ/1W |
| LDM | 4.7uH |
| LCM | 2mH |

3. For additional information please refer to application notes on www.mornsun-power.com

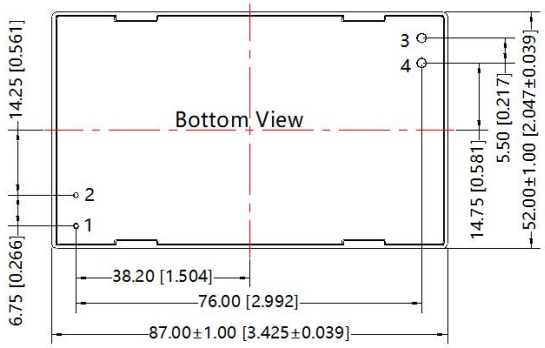
## Dimensions and Recommended Layout

THIRD ANGLE PROJECTION




Note : Grid 2.54*2.54mm



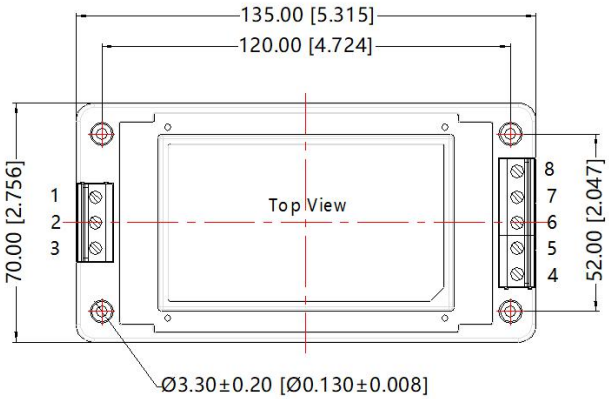

| Pin-Out | |
|---|---|
| Pin | Function |
| 1 | AC(L) |
| 2 | AC(N) |
| 3 | +Vo |
| 4 | -Vo |

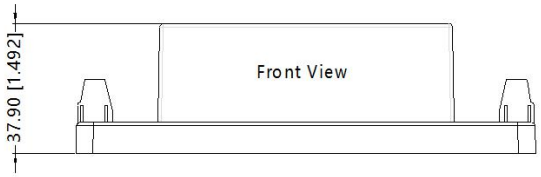
Note:
Unit: mm[inch]
Pin diameter tolerances: ±0.10[±0.004]
General tolerances: ±0.50[±0.020]


MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

## A2S Dimensions

THIRD ANGLE PROJECTION



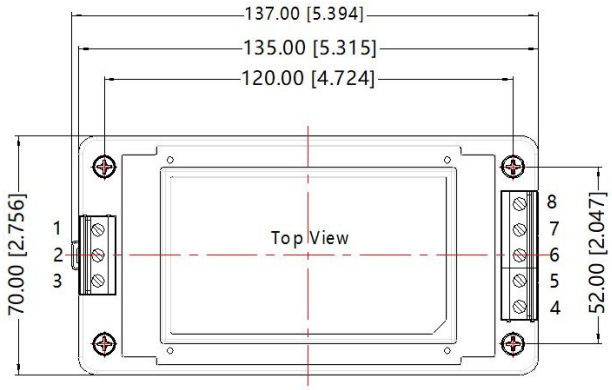



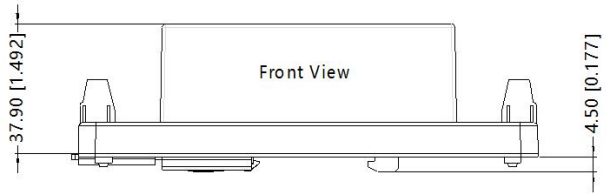

| Pin-Out | |
|---|---|
| Pin | Function |
| 1 | AC(L) |
| 2 | NC |
| 3 | AC(N) |
| 4 | +Vo |
| 5 | -Vo |
| 6 | NC |
| 7 | NC |
| 8 | NC |

Note:
Unit:mm[inch]
Wire range:24~12 AWG
Tightening torque: Max 0.4 N·m
General tolerances:±1.00[±0.040]

## A4S Dimensions

THIRD ANGLE PROJECTION




| Pin-Out | |
|---|---|
| Pin | Function |
| 1 | AC(L) |
| 2 | NC |
| 3 | AC(N) |
| 4 | +Vo |
| 5 | -Vo |
| 6 | NC |
| 7 | NC |
| 8 | NC |

Note:
Unit: mm[inch]
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N·m
Installed on DIN RAIL TS35
General tolerances: ±1.00[±0.040]


MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220019(DIP package); 58220031 (A2S/A4S package);
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity<75% with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on our company corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.
Address: No.8 Nanyun 4th Road, Huangpu District, Guangzhou, China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com


MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation